


American Retail Supply Assembly Instructions

Garment Rack - 428101

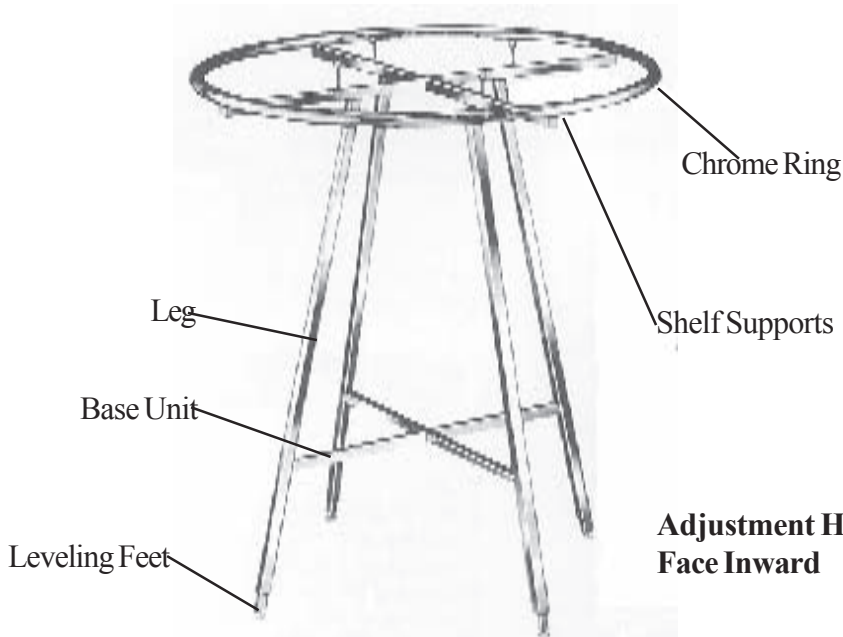


Parts List

1 - Base Unit
4 - Adjustable Legs
4 - Shelf Supports
1 - Chrome Ring

If Installing Lower Ring
4 - Clamps
1 - Addon Ring

**Adjustment Holes
Face Inward**

1. See diagram above; insert adjusting legs into base unit. Spring button facing in, to correspond to adjuster holes in the base legs. Adjust all four legs to same height.
2. Spread base open so that studs that point upward will align with holes in underside of chrome ring. Place ring on base; if this is a two-tier fixture, be sure to use ring marked for "top".
3. Adjust levelling feet (or install optional casters) to compensate for floor variations. Shelf supports are provided. Glass shelf available from TMS.

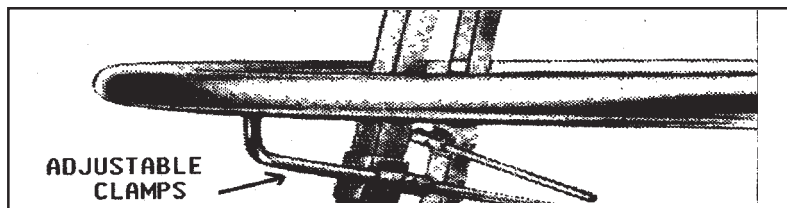

Instructions for Two Tier Racks:

1. Follow steps 1 and 2 above; adjust top ring height as desired by adjusting leg length, then remove top ring.
2. Install an adjustable clamp at each leg (4) at an approximate midpoint or at desired height, accounting for longest length. Appearance and style of clamps may vary from the illustration, however illustration methods are similar. Each clamp consists of a "U" shaped bracket that wraps around leg. Clamp has a stem that faces upward and fits into hole in the underside of the ring. Secure tentatively with either thumbscrews or Allen-wrench set screws as supplied.
3. Lower ring over top of fixture and prepositions; readjust and level clamp brackets and stems for proper fit, then tighten securely. Restock samples on fixture as in #4 above, lower right first if possible, for balanced weight.



(800) 426-5708 • www.MakeYouHappy.com

**Packaging • Display • Price Marking
Inventory Control • Promotional Products**